


WINDOW LEGEND								
Marker Text	A	B	C	D	E	F	G	H
Type	DOUBLE DOUBLE HUNG	SINGLE DOUBLE HUNG	SINGLE DOUBLE HUNG	SINGLE DOUBLE HUNG	HORIZONTAL SLIDER	SINGLE DOUBLE HUNG	DOUBLE DOUBLE HUNG	SINGLE DOUBLE HUNG
Material	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS	ALUMINUM CLAD WOOD OR FIBERGLASS
Glazing	LOW-E, DUAL PANEL	LOW-E, DUAL PANEL	LOW-E, DUAL PANEL FROSTED GLASS	LOW-E, DUAL PANEL	LOW-E, DUAL PANEL	LOW-E, DUAL PANEL	LOW-E, DUAL PANEL TEMPERED GLASS	SINGLE PANE, TEMPERED GLASS
Quantity	1	1	1	1	1	1	1	1
W x H Size	5'-2"x4'	3'x5'	2'-6"x3'	3'x4'	3'-8"x3'-8"	2'-6"x4'	5'-2"x4'	26"x4'
Remarks		EGRESS WINDOW						INTERIOR WINDOW

DOOR LEGEND					
Marker Text	1	2	3	4	5
Type	EXTERIOR DOOR	BI-FOLD DOOR	INTERIOR DOOR	POCKET DOOR	SLIDING GLASS DOOR
Quantity	1	1	1	1	1
W x H Size	3'x6'-8"	2'-6"x6'-8"	3'x6'-8"	2'-6"x6'-8"	6'x6'-8"
Material	1 3/4" THK. SOLID CORE	1 3/8" THK. HOLLOW CORE	1 3/8" THK. HOLLOW CORE	1 3/4" THK. SOLID CORE	ALUMINUM CLAD WOOD OR FIBERGLASS
Remarks					TEMPERED GLASS

SHEET INDEX	
A1	Site Plans / Floor Plan / Electrical Plan / Door & Window Schedules
S1	Foundation Plan / Roof Framing Plan / Structural Details
A2	Elevations / Sections / Plumbing Plan
A3	Details

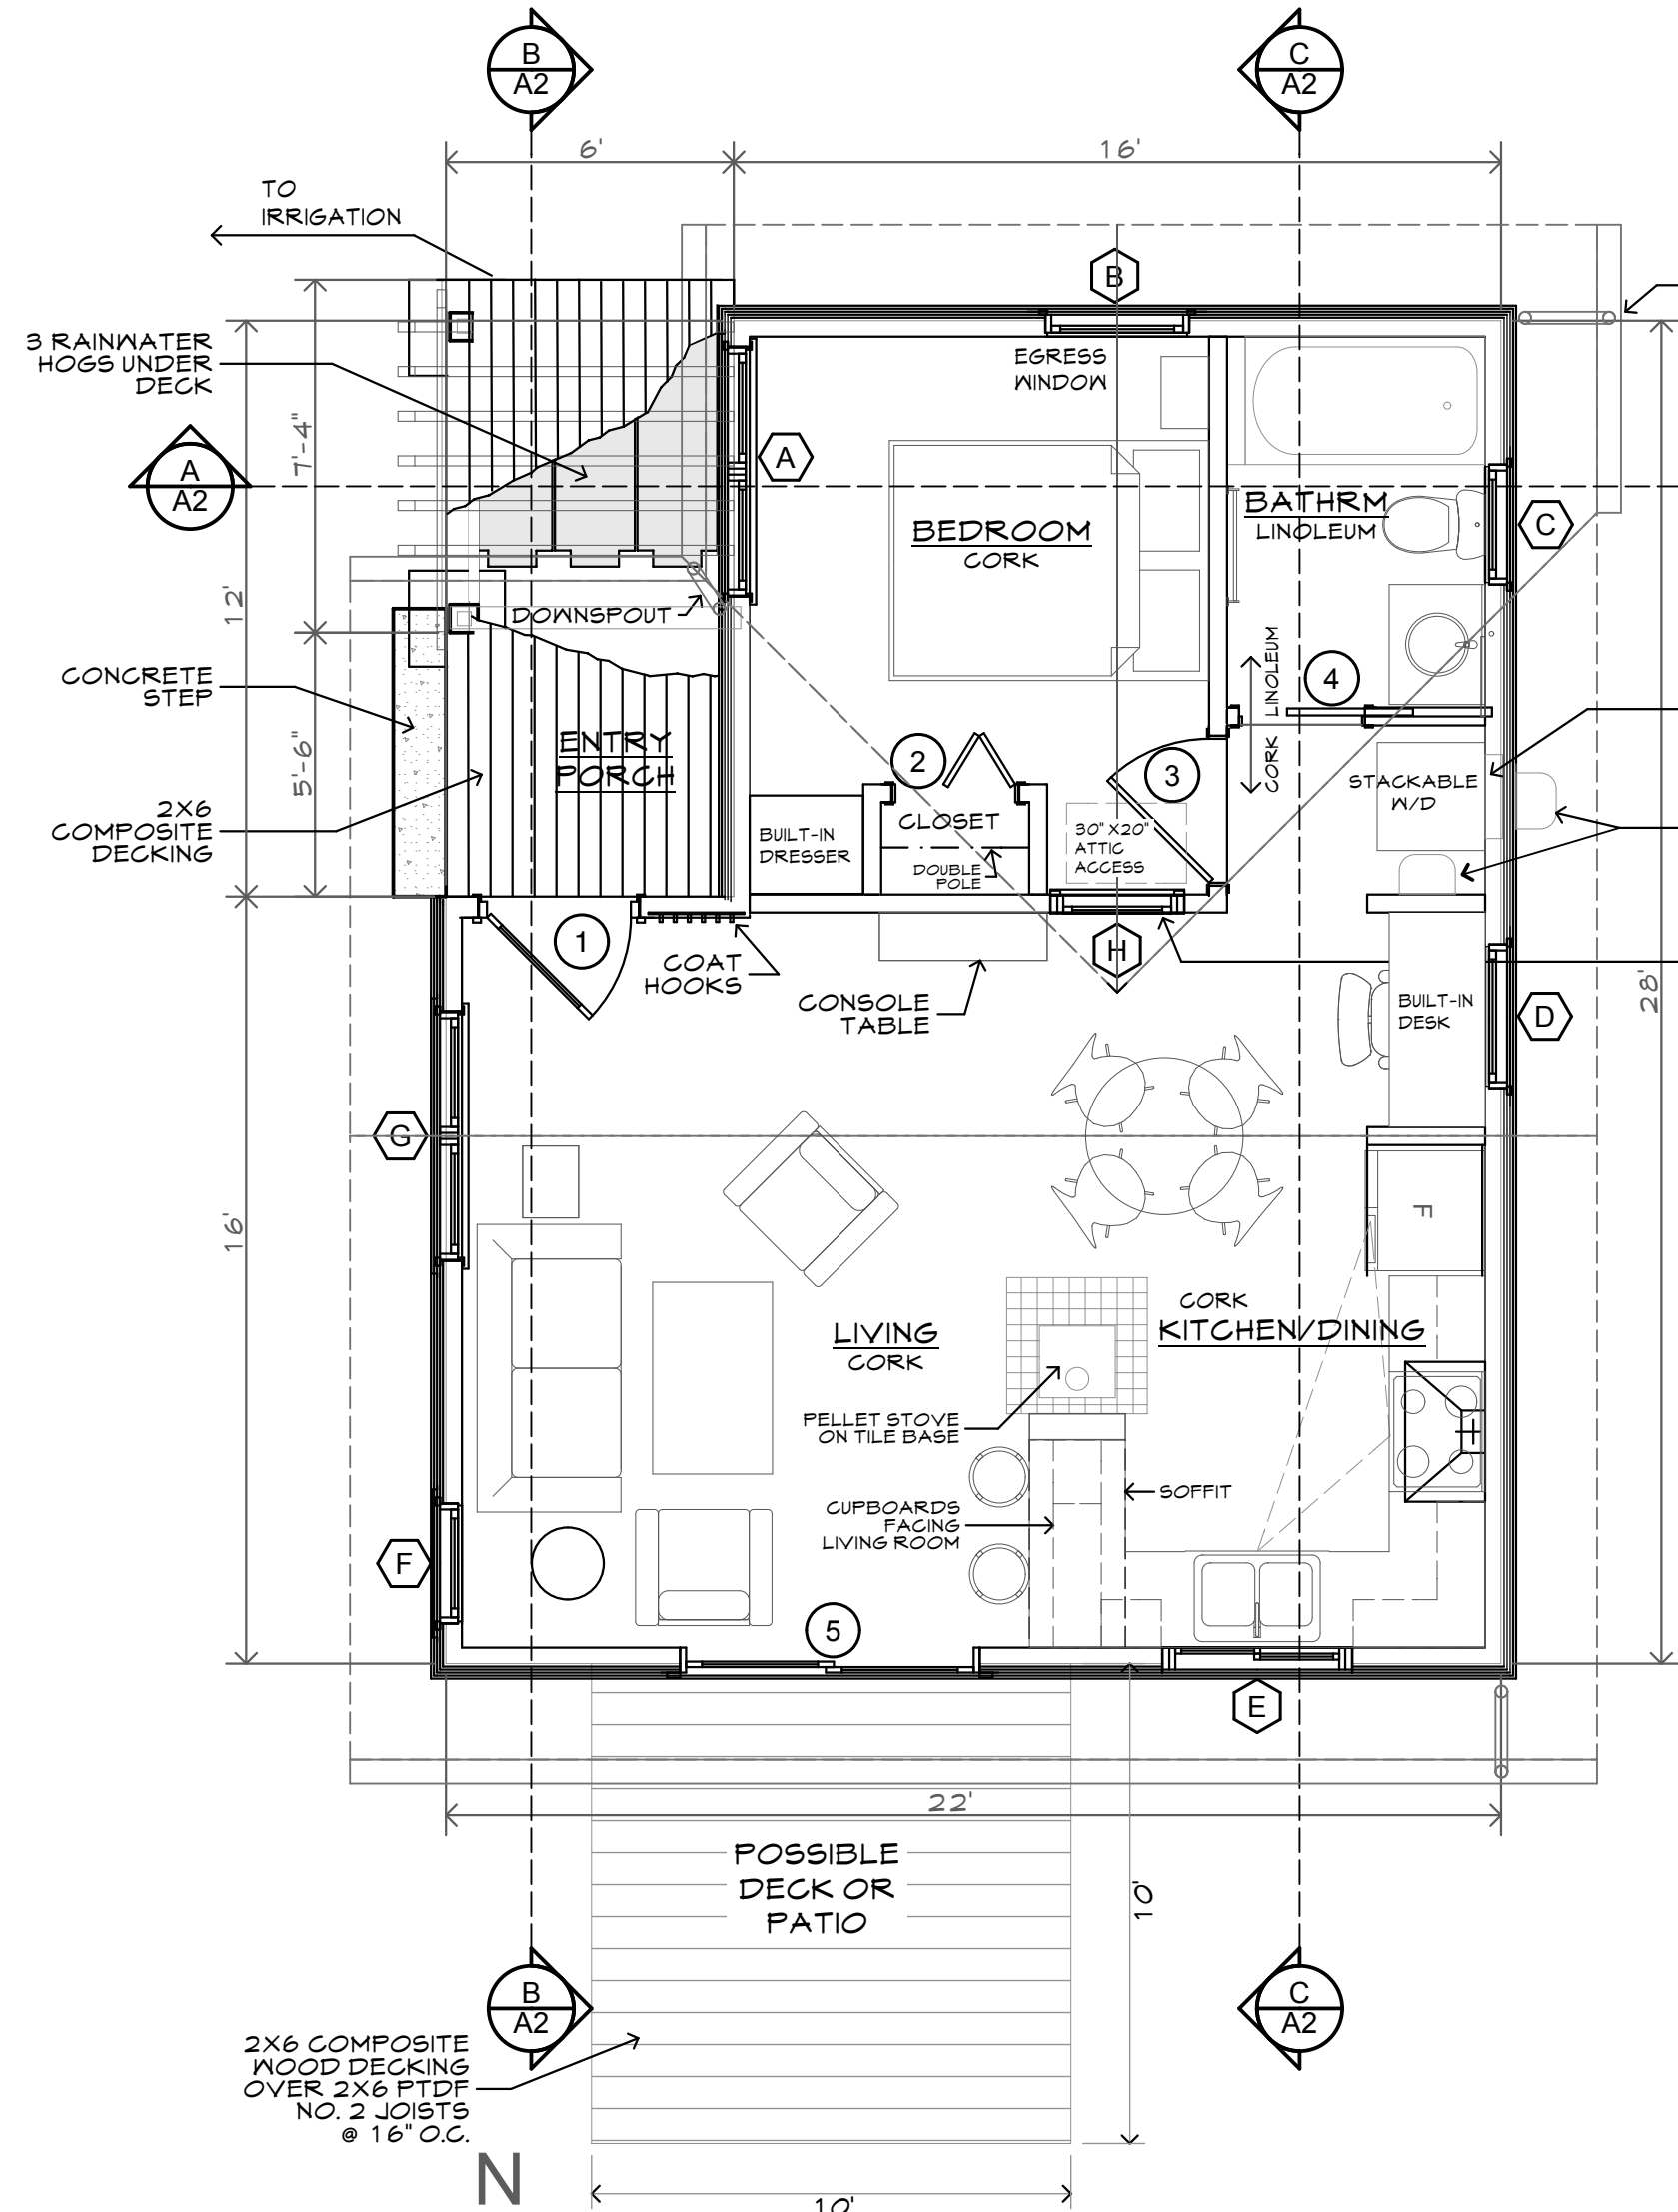


Floor Plan
SCALE: 1/4" = 1'-0"
(REFERENCE ONLY)

ATTIC VENTILATION
5.14 S.F. / 300 S.F. = 1.11 S.F. (PER CBC 1203.2, EXCEPTION)
MINIMUM OF 1.71 S.F. OF ATTIC GROSS VENTILATION REQUIRED
2 ATTIC VENTS = 2 X 2 S.F. PER VENT X 50% = 2 S.F.
14 EAVE VENTS = 14 X 0.076 S.F. EACH VENT = 1.44 S.F.
2 S.F. = 1.44 S.F. = 3.44 S.F. ACTUAL > 1.71 REQUIRED = MEETS REQUIREMENT


UNDER FLOOR VENTILATION
5.14 S.F. / 150 S.F. = 3.4 S.F.
MINIMUM OF 3.4 S.F. OF UNDER FLOOR GROSS VENTILATION REQUIRED
(12) 6" X 14" VENTS = 12 X 28.5 S.F. NFVA EACH VENT = 3.42 S.F. VENTILATION
3.4 S.F. ACTUAL = 3.4 S.F. REQUIRED = MEETS REQUIREMENT

ELECTRICAL LEGEND:


- 6" AIR-TITE RECESSED DOWNLIGHT CFL 26 WATT (ICAT IN INSULATED CEILING) WITH ELECTRONIC BALLAST AND WHITE TRIM AND BAFFLE. "S" BY SYMBOL INDICATES SLOPING CAN.
- 5" AIR-TITE RECESSED DOWNLIGHT CFL 19 WATT FROSTED LENS SHOWER LIGHT
- INTERIOR INCANDESCENT SCENCE, 19 WATT MINIMUM
- SURFACE MOUNTED FLUORESCENT
- FLUORESCENT STRIP LIGHT
- HUMIDITY SENSING FAN/LIGHT/NITE LIGHT BROAN MODEL QTKE 110SFLT, 42 WATT FLUORESCENT LIGHT, 4W NIGHTLIGHT 0.7 SONES, 110 CFM, OR EQUAL
- WALL MOUNTED FLUORESCENT LIGHT FIXTURE
- SINGLE PENDANT FLUORESCENT LIGHT FIXTURE
- DOUBLE PENDANT FLUORESCENT LIGHT FIXTURE
- RECESSED HARDWIRED LED UNDER CABINET LIGHT
- EXTERIOR FLUORESCENT SCENCE W/MOTION SENSOR AND PHOTOCELL "W" INDICATES NET LOCATION
- SMOKE DETECTOR-HARDWIRED
- DUPLEX OUTLET
- GROUND FAULT CIRCUIT INTERRUPTER
- NET RATED GROUND FAULT CIRCUIT INTERRUPTER
- ARC FAULT CIRCUIT INTERRUPTER
- SWITCHED RECEPTACLE
- 220V OUTLET
- SWITCH
- MICRO JAMB SWITCH
- DIMMER SWITCH
- CAT VI LINE
- HOSE BIB

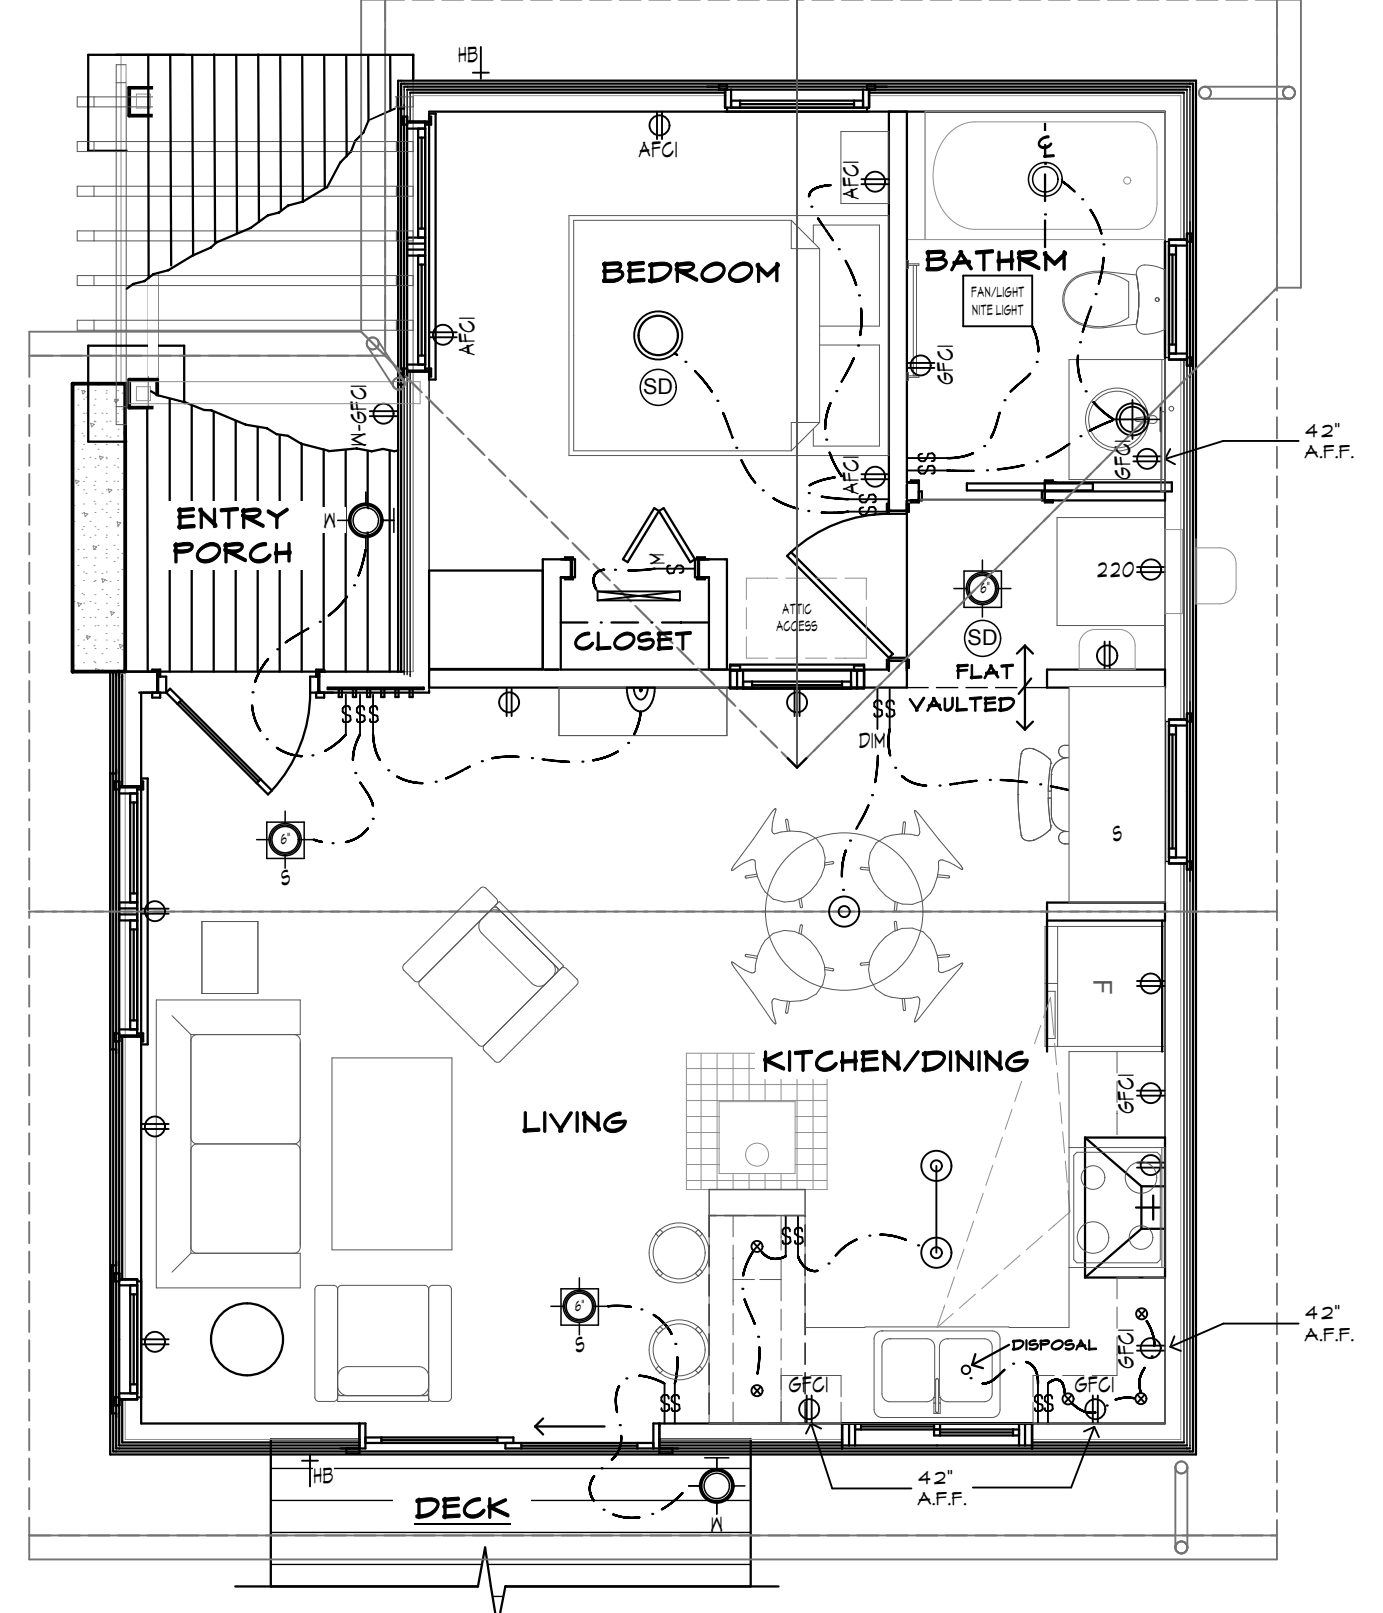

Electrical Plan
SCALE: 1/4" = 1'-0"

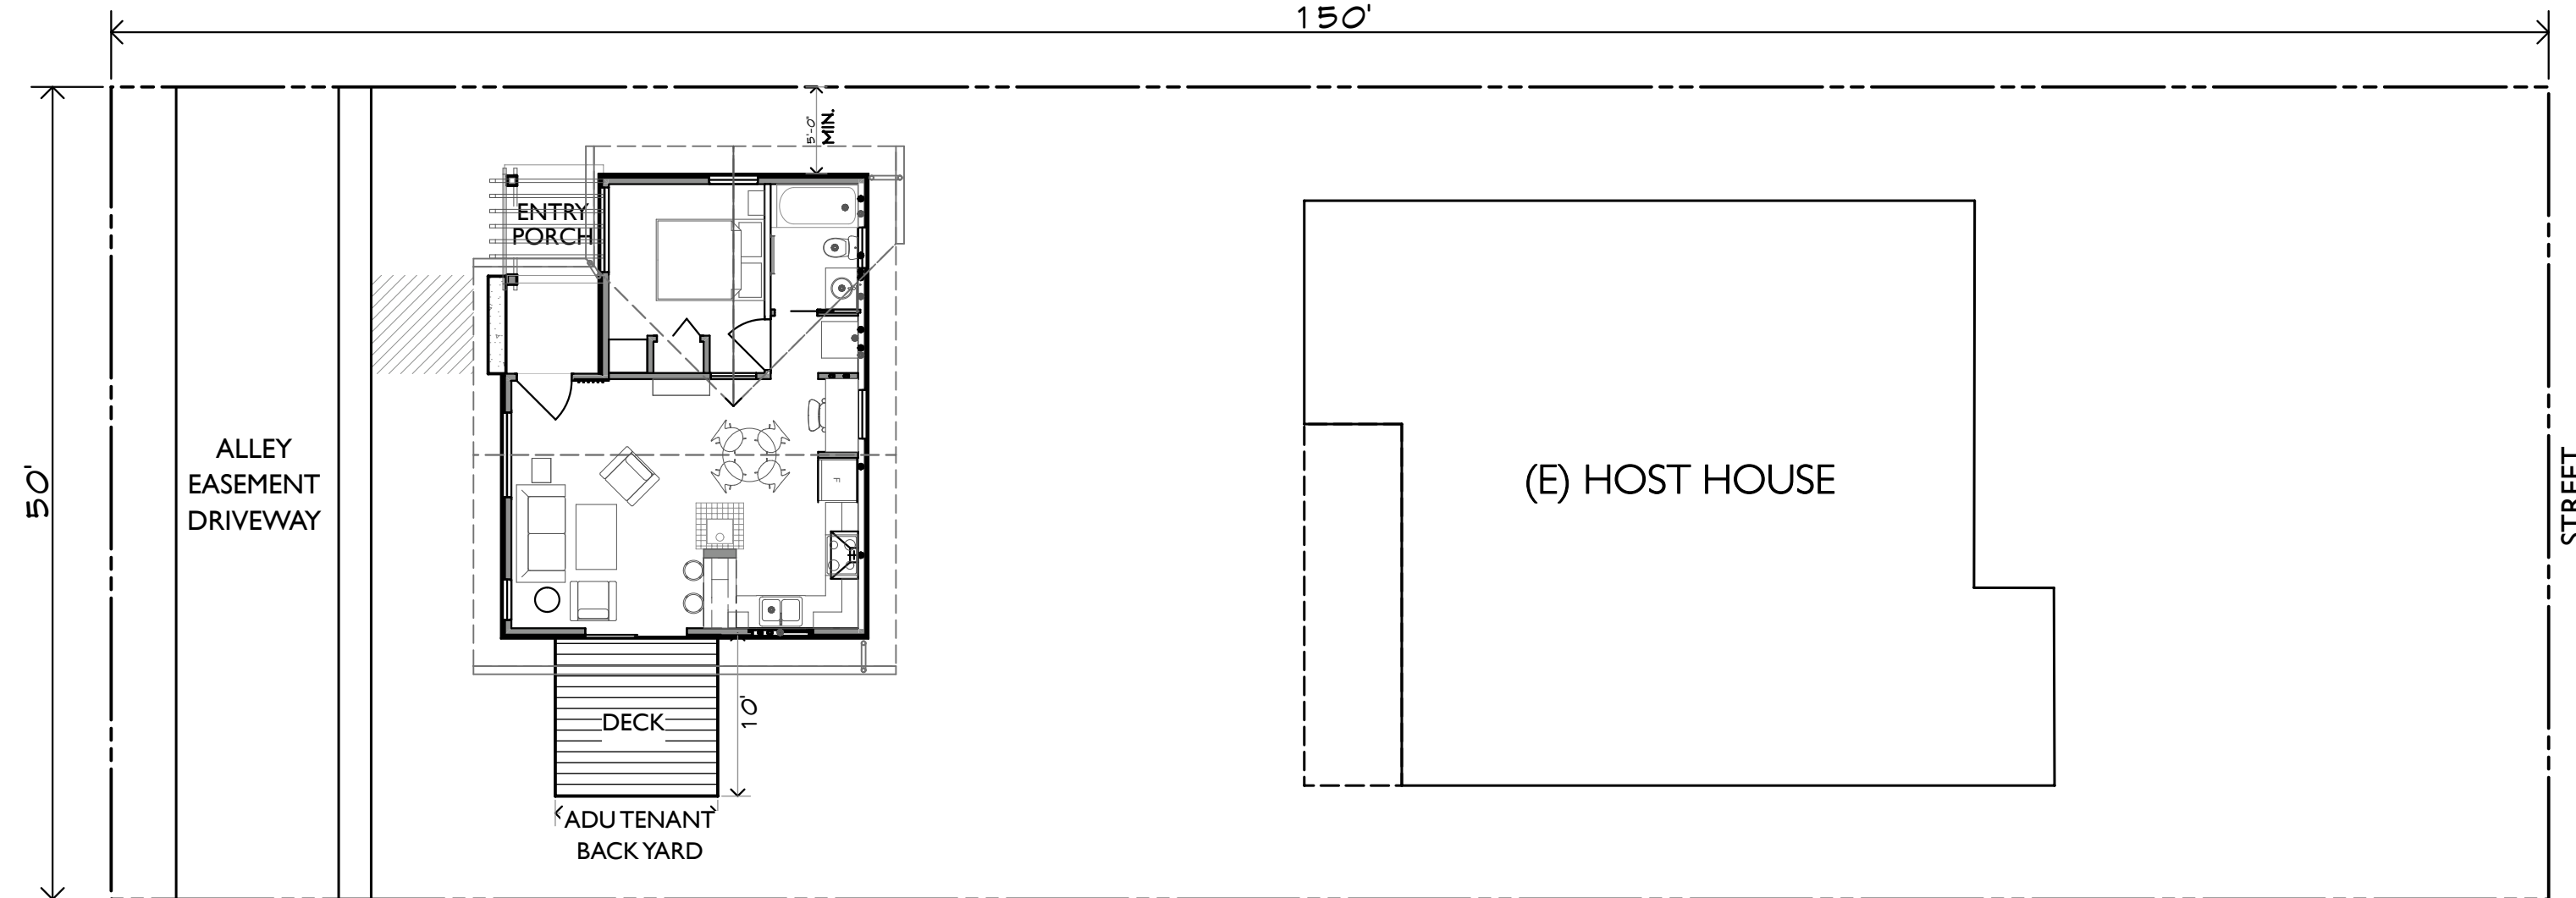

Site Plan - Option B
SCALE: 1" = 10'
(REFERENCE ONLY)

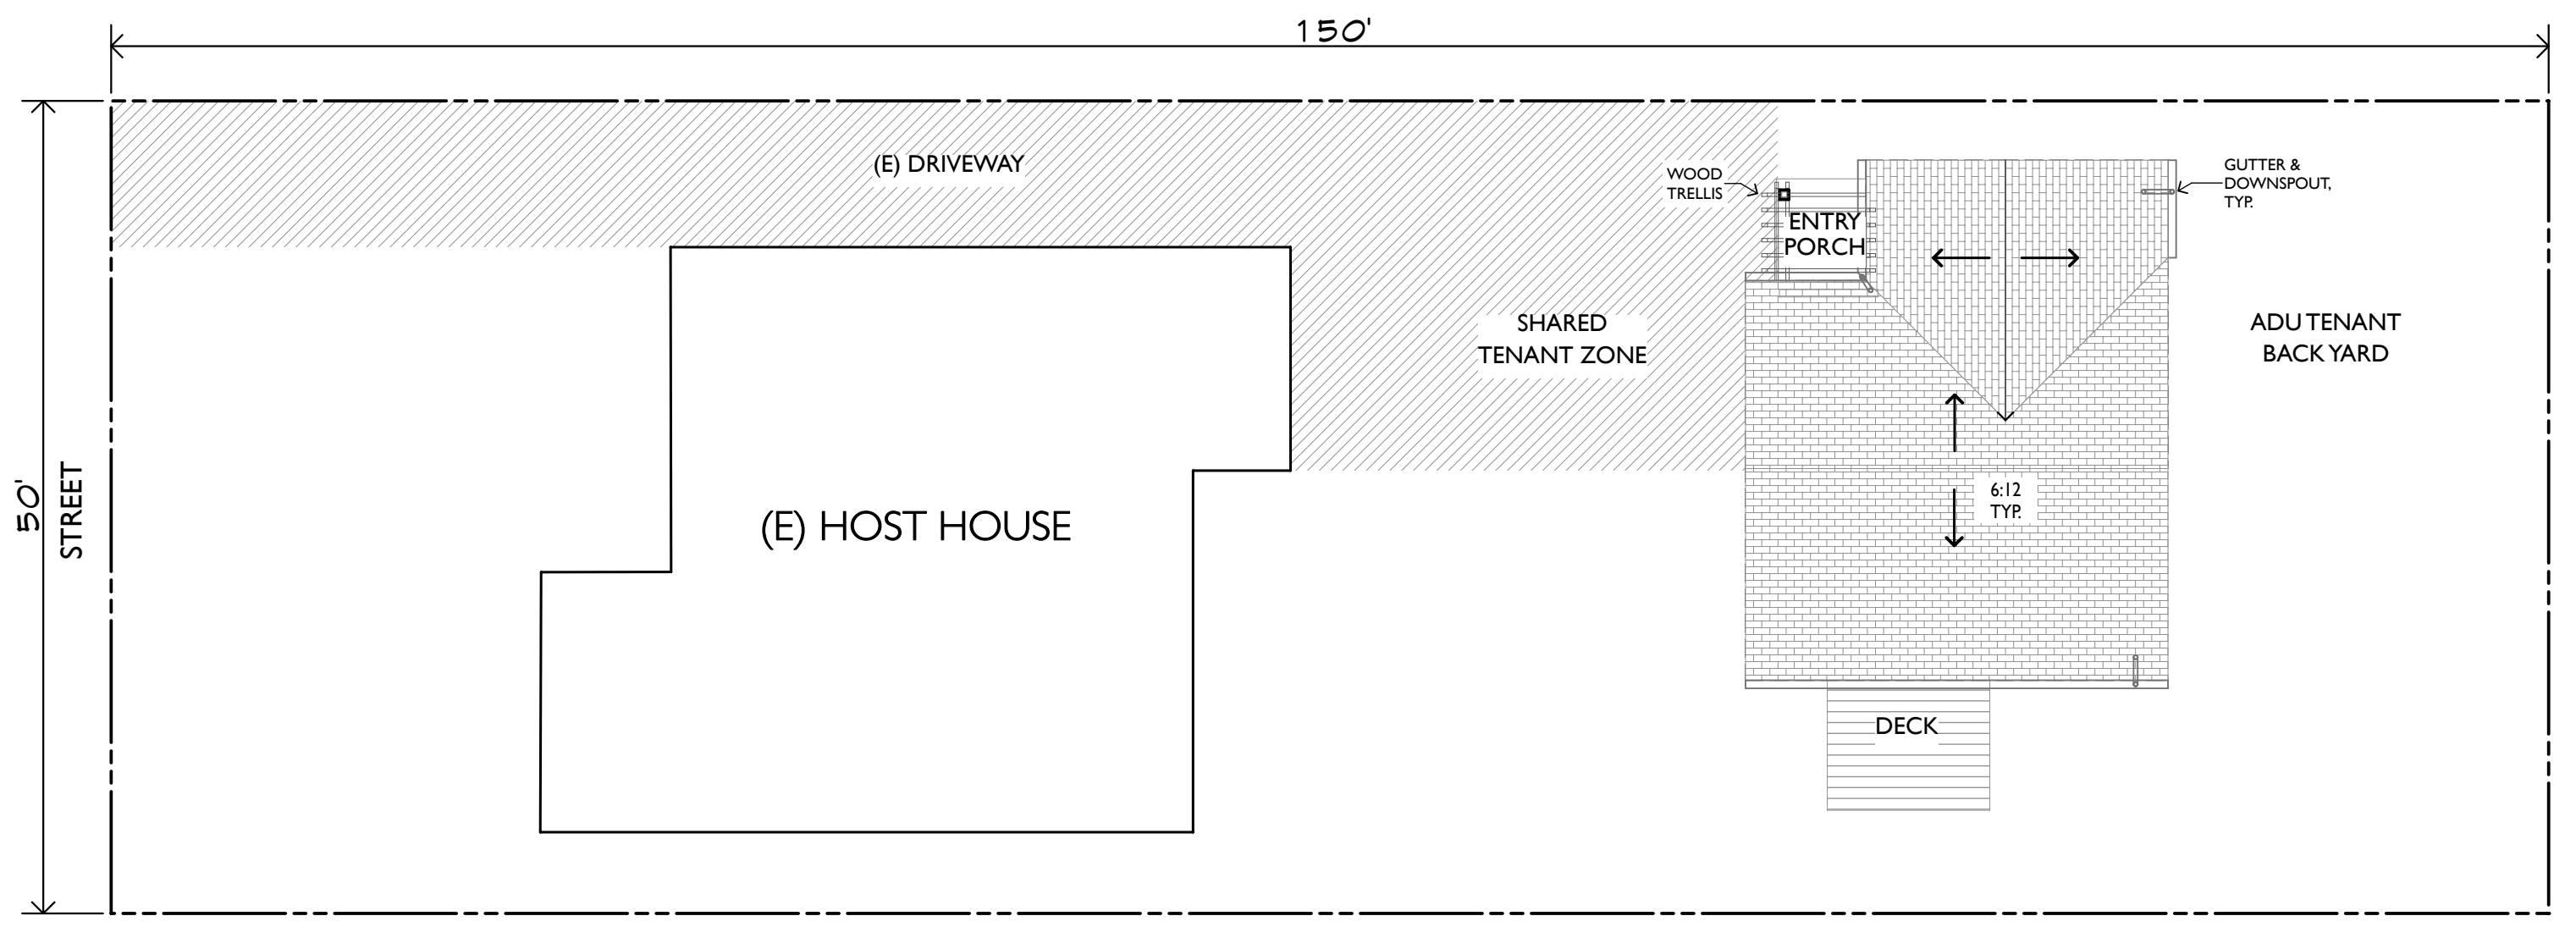

Site Plan - Option A
SCALE: 1" = 10'
(REFERENCE ONLY)

NOTE: THESE MATERIALS ARE CONCEPTUAL IN NATURE ONLY AND SHOULD NOT BE USED AS WORKING DRAWINGS OR CONSTRUCTION DOCUMENTS

Boone Low Ratliff
Architects, Inc.
Boone Low Ratliff Architects, Inc.
157 Van Ness Ave.
Santa Cruz, CA 95060
Tel: 831-423-1316
Fax: 831-423-1386
email: admin@boonelow.com

PROJECT

ACCESSORY DWELLING UNIT (ADU)
PROTOTYPE
CITY OF FORT BRAGG
416 N. FRANKLIN STREET
FORT BRAGG, CA 95437

DRAWING

Site Plans / Floor Plan /
Electrical Plan / Door &
Window Schedules

PROTOTYPE
DESIGN SET

DATE
07/03/2009

SHEET
A1